

Model No.: **GP10AF**

Description : Mercury Free & Lead Free
Alkaline High Voltage Multicell

Nominal Voltage : 9Volts

Nominal Dimensions : $\varnothing 10.22\text{mm} \times 22.1\text{mm}$

Terminal : Nickel plated flat contacts - protruded
red(+); recessed black (-)

Jacket : Metal jacket

Internal Connection : Pressure

Applications : Remote controller

Average Weight : 5.6g

Date Code : Unless otherwise specified, each
batteries will carry a numeric year
code and analogue month code (+)

Shelf Life : Not less than 90% of the service
capacity within first year storage
at $20 \pm 2^\circ\text{C}$ 55 \pm 20%RH

Insulation : 5M Ω min.

Resistance

Close Circuit Voltage : 7.0 Volts (min.)(load resistor 600 Ω
at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)

Current Drain : Under 15mA pulse, 0.5mA
continuous



Nominal Service Life : 74hrs (at 15k Ω load)
(to 4.5V at $20 \pm 2^\circ\text{C}$)

Average Service : 38mAh (at 15k Ω load)

Capacity
(to 4.5V at $20 \pm 2^\circ\text{C}$)


Cross References:

GP	Eveready	Duracell	Varta
10AF	---	---	---

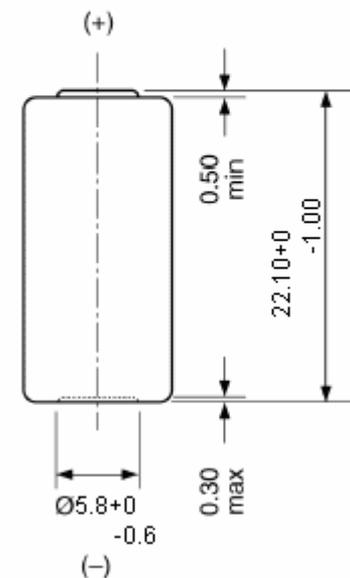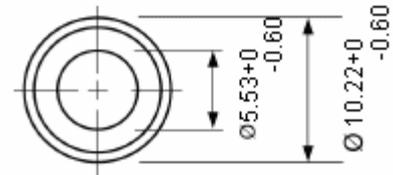

Unit : mm

Typical Discharge characteristics at $20 \pm 2^\circ\text{C}$

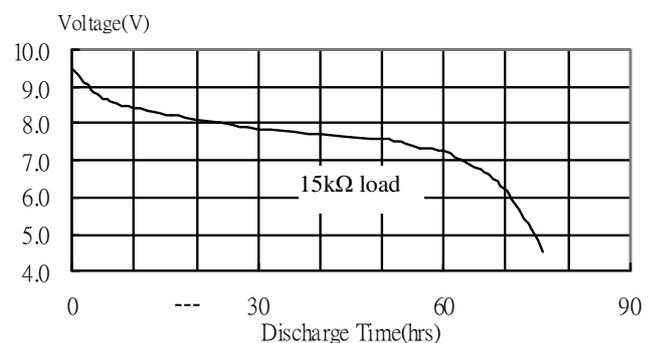

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.