
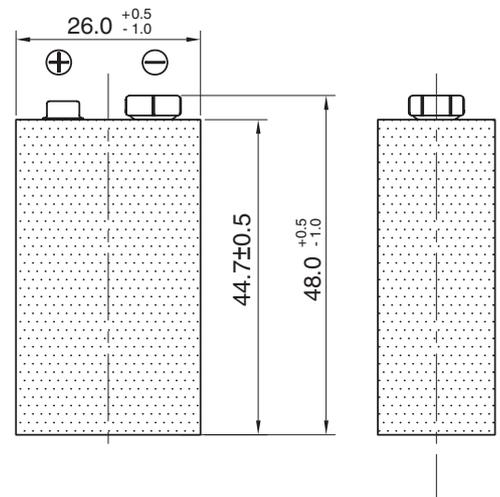


Model No.: **GPCR-V9**

<b>Description</b>	: Lithium Battery, 9V Size
<b>Chemical System</b>	: Lithium Manganese Dioxide
<b>Nominal Voltage</b>	: Volts
<b>Nominal Capacity</b>	: 800mAh @ 10mA to 5.4V at 23°C
<b>Dimensions</b>	: 26(L) x 16.5(W) x 48(H)mm
<b>Terminals</b>	: Standard snap fastener stud(+) and socket(-)
<b>Shelf Life</b>	: up to 10 years
<b>Average Weight</b>	: App. 34g
<b>Max. Constant Current</b>	: 1000mA
<b>Max. Pulse Current</b>	: 2500mA
<b>Application</b>	: Smoke detectors, security devices, medical equipment, carbon monoxide alarms, explosion gas alarms, meters (gas/electric/water), metal detectors, wireless transmitters, electronic toll collection system, etc.
<b>Operating temperature</b>	: -40°C to +60°C
<b>UL Standard</b>	: UL1642 (File no. MH46184) UL2054 (File no. MH25972)
<b>IEC Standard</b>	: IEC60086-4
<b>UN Standard</b>	: UN38.3


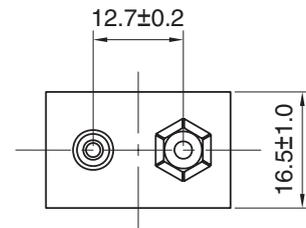


 Label Area

Unit : mm

### Cross References:

ANSI	GP	Energizer	Ultralife
1604LC	CR-V9	L522	U9VL

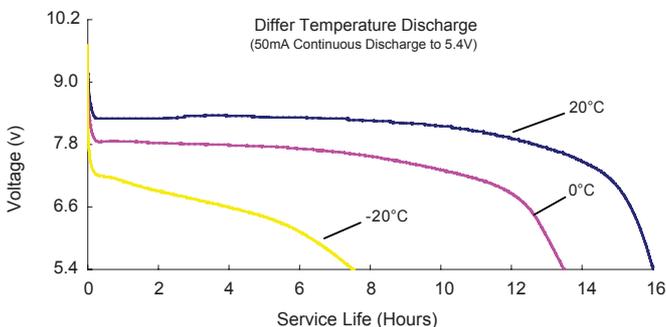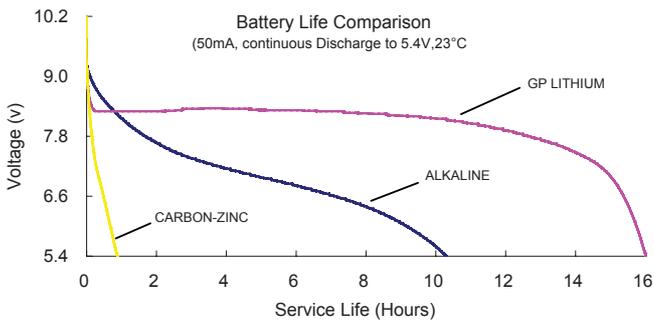

[www.gpbatteries.com](http://www.gpbatteries.com)

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.