


GP Batteries

NO MERCURY ADDED	
Description	: Six layers built zinc carbon batteries
Chemical System	: Zinc-Manganese dioxide (Ammonium chloride)
Nominal Voltage	: 9.0 Volts
Nominal Dimensions	: 26.5 mm × 17.5 mm × 48.5 mm
Terminals	: Miniature snap fasteners stud(+) and socket(-)
Jacket	: Printed metal jacket
Applications	: All electronic devices, e.g. toys, clock radio, smoke detector
Effective period	: 24 months
Average Weight	: 36 g

Model No.: GP1604GLF

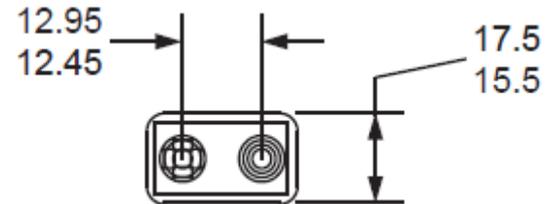


Cross References:

GP	JIS	IEC
1604GLF	6F22	6F22


Typical Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
620 Ohms	2 Hrs/Day	5.40 V	30.0 Hrs

620 Ohms 2 Hrs/Day EV = 5.40 V

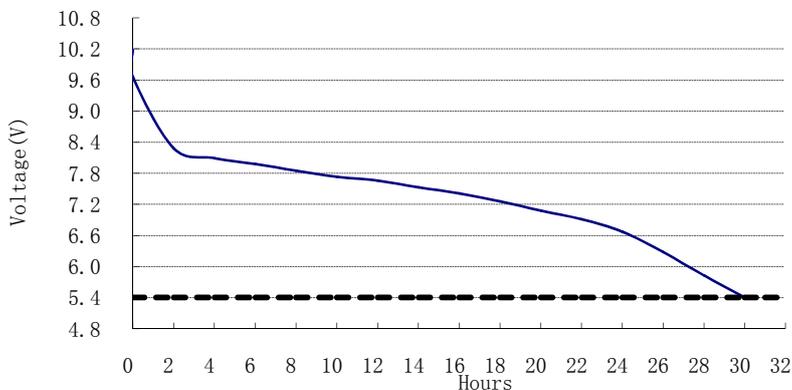

At 20±2°C and 55±20% RH within 30 days of manufacture

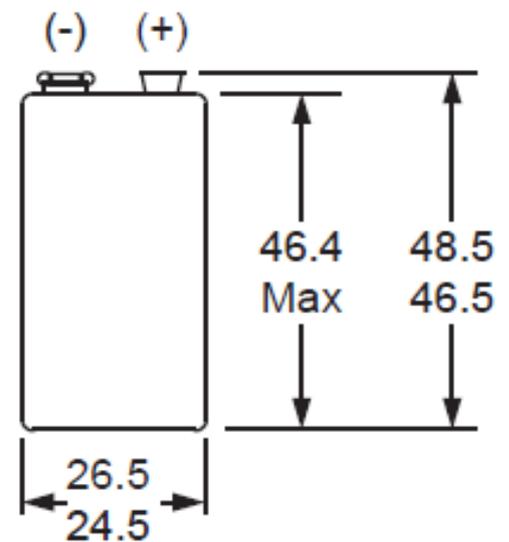

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors

www.gpbatteries.com

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

Copyright © GPI International Ltd. - All rights reserved

Member
Gold Peak Group