

Alphacool article number: 18648

The NexXoS V.2 radiator is the further development of the already established NexXoS V.1 series and rightly takes its place among Alphacool's high-end full copper radiators. The fresh design in modern, noble white and the numerous technical details make the NexXoS V.2 radiator the perfect partner for your own water cooling system.

## Alphacool NexXoS ST30 Full Copper 240mm Radiator V.2 White Special Edition



- patented screw plugs
- new, modern design
- solid copper radiator

We assume no responsibility for any typing errors.

Alphacool International GmbH, Marienberger Strasse 1, 38122 Braunschweig Tel: (+49)0531 288 740 Supportmail: [info@alphacool.com](mailto:info@alphacool.com)

## Scope of delivery

1x Alphacool NexXoS ST30 Full Copper 240mm Radiator V.2, White Special Edition  
8x M3x8 screw  
8x M3x30 screw  
2x M3x35 screw  
3x screw plug  
1x Allen key  
1x screw plug tool

## Technical data

L x W x H	271.5 x 124 x 30 mm (+/- 3% tolerance in the range of the prechamber)
Material cooling fins, channels & prechamber	copper
Material outer housing	steel
Fins per Inch	15
Threads	5x G1/4"
Thread size fan mounting	M3
Fan size	120 mm
Fan slots	2 one-sided / 4 double-sided
Max working temperature	60 °C
Weight	581 g
Colour	White

## Download Links

Product pics	<a href="https://www.alphacool.com/download/1021517_NexXoS_ST30_Full_Copper_240mm_Radiator_V.2_White_pics.zip">https://www.alphacool.com/download/1021517_NexXoS_ST30_Full_Copper_240mm_Radiator_V.2_White_pics.zip</a>
Manual	<a href="https://www.alphacool.com/download/Radiators_NexXosV2.pdf">https://www.alphacool.com/download/Radiators_NexXosV2.pdf</a>

## Packaging dimensions 1 unit

L x W x H	34,5 x 13,5 x 4 cm
Weight	0,772 kg

## Other data

Certificates	CE, FC, RoHS
EAN	4250197186483
Customs code	84195080900

We assume no responsibility for any typing errors.

Alphacool International GmbH, Marienberger Strasse 1, 38122 Braunschweig Tel: (+49)0531 288 740 Supportmail: [info@alphacool.com](mailto:info@alphacool.com)

## Article text

The NexXoS V.2 radiator is the further development of the already established NexXoS V.1 series and rightly takes its place among Alphacool's high-end full copper radiators. The fresh design in modern, noble white and the numerous technical details make the NexXoS V.2 radiator the perfect partner for your own water cooling system.

### **Uncompromising in the choice of materials**

Alphacool is the only manufacturer worldwide to use exclusively copper for all water-bearing parts in the radiator. The pre-chambers, cooling fins and cooling channels are all made of pure copper. The only exceptions are the threaded inserts (made of brass) and the outer casing of the radiator (made of sheet steel).

### **Sufficient cooling capacity**

To maximise the performance of the radiator, Alphacool reaches deep into its bag of tricks and uses pure copper for the cooling fins, cooling channels and pre-chambers due to the high thermal conductivity of 400 W/mK (in comparison: aluminium 236 W/mK). The special fin density of the radiator with a fin spacing of 15 FPI give optimal airflow and performance. All cooling fins are additionally serrated. These act as tiny wings that direct the airflow in the desired direction and ensure controlled air turbulence. This increases the cooling capacity and minimises possible flow noise.

### **Patented screw plugs**

All NexXoS V.2 radiators use Alphacool's patented stop fittings. Anyone who has mounted a radiator on the front or in the roof of a case is familiar with the fact that protruding stop fittings can stop the radiator from sitting flush. With the patented stop fittings, Alphacool offers an excellent solution. The stop fittings are completely recessed in the radiator and sit flush with its surface. This means that nothing stands in the way of a clean installation. Of course, the radiators also look much more elegant with the flat stop fittings.


### **Plenty of connection options**

All versions of the NexXoS V.2 radiators have two options for IN and OUT on each side. On the opposite end is a fill or vent port, which can also be used to drain the water circuit.

### **Safety first**

The NexXoS V.2 radiator has a special protective plate that prevents fan or mounting screws from being screwed in too deeply. These plates are beneath the screw holes that are used to mount the fans to the radiator, or for mounting the radiator to the case. This protects the cooling fins and water channels underneath from damage.

## Dimensions

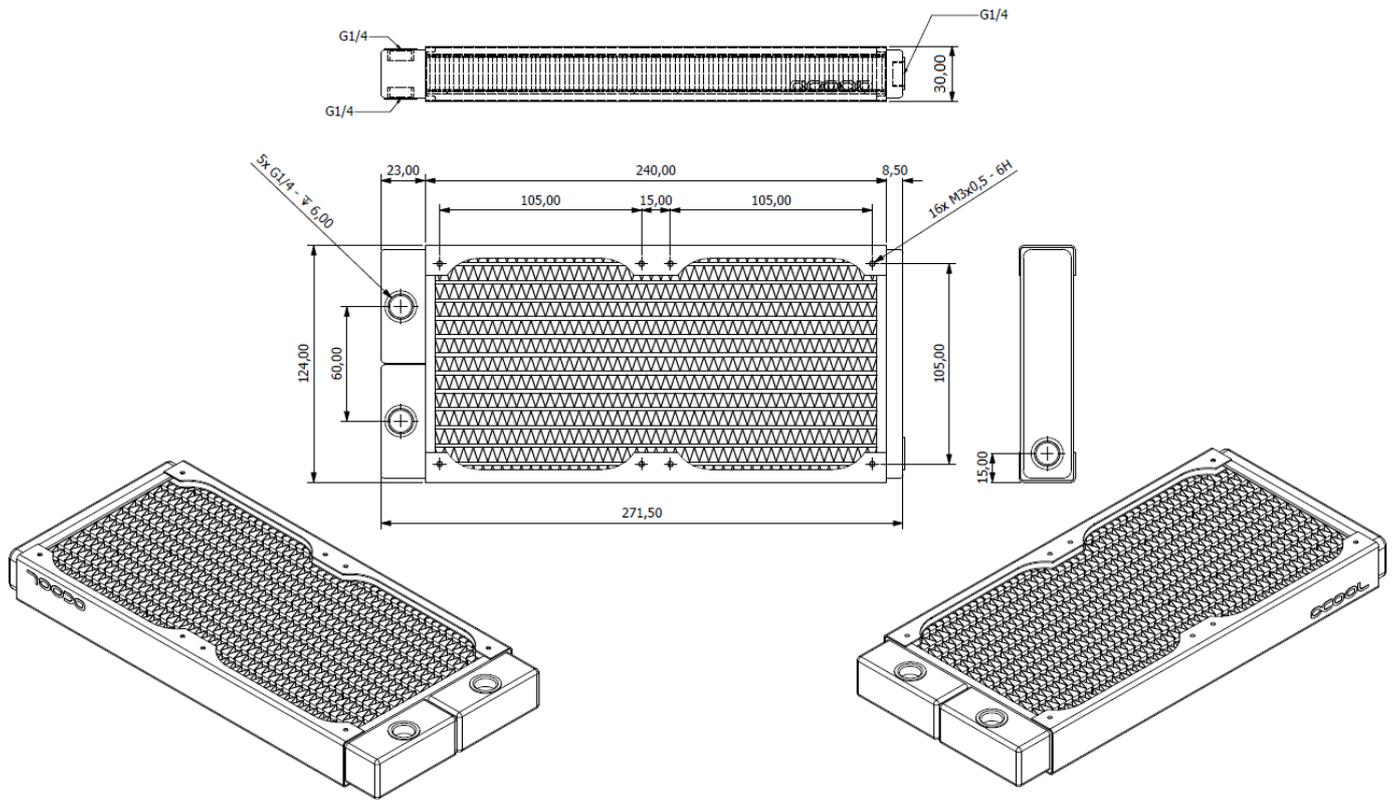

We assume no responsibility for any typing errors.

Alphacool International GmbH, Marienberger Strasse 1, 38122 Braunschweig Tel: (+49)0531 288 740 Supportmail: [info@alphacool.com](mailto:info@alphacool.com)